

## Electric capacitive type proximity sensor

### ■ Features

- Sensing of iron, metal, plastic, water, stone, wood etc.
- Long life cycle and high reliability
- DC type: Built-in surge protection circuit, reverse polarity protection circuit  
AC type: Built-in surge protection circuit
- Easy to adjust of the sensing distance with sensitivity adjuster
- Red LED operation indicator
- Easy to control of level and position



⚠ Please read "Caution for your safety" in operation manual before using.

### ■ Type

#### ◎ DC 3-wire type

Appearances	Model
M18	CR18-8DN
	CR18-8DP
	CR18-8DN2 ※
M30	CR30-15DN
	CR30-15DP
	CR30-15DM2 ※

※ mark can be customized.

#### ◎ AC 2-wire type

Appearances	Model
M18	CR18-8AO
	CR18-8AC
M30	CR30-15AO
	CR30-15AC

### ■ Specifications

Model		CR18-8DN CR18-3DP CR18-8DN2	CR30-15DN CR30-15DP CR30-15DN2	CR18-8AO CR18-8AC	CR30-15AO CR30-15AC
Sensing distance		8mm	15mm	8mm	15mm
Hysteresis		Max. 20% of sensing distance			
Standard sensing target		50×50×1mm(Iron)			
Sensing distance		0 to 5.6mm	0 to 10.5mm	0 to 5.6mm	0 to 10.5mm
Power supply (Operating voltage)		12-24VDC(10-30VDC)		100-240VAC 50/60Hz(85-264VAC)	
Current consumption		Max. 15mA		—	
Leakage current		—		Max. 2.2mA	
Response frequency※ <sup>1</sup>		50Hz		20Hz	
Residual voltage		Max. 1.5V		Max. 20V	
Affection by Temp.		Max. ±10% for sensing distance at ambient temperature 20°C			
Control output		Max. 200mA			
Insulation resistance		Min. 50MΩ(at 500VDC megger)			
Dielectric strength		1500VAC 50/60Hz for 1minute			
Vibration		1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours			
Shock		500m/s <sup>2</sup> (approx. 50G) in each of X, Y, Z directions for 3 times			
Indicator		Operation indicator(red LED)			
Environ- ment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C			
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH			
Protection circuit		Reverse polarity protection, Surge protection		Surge protection circuit	
Protection		IP66(IEC standard)	IP65(IEC standard)	IP66(IEC standard)	IP65(IEC standard)
Cable		ø4, 3-wire, 2m	ø5, 3-wire, 2m	ø4, 2-wire, 2m	ø5, 2-wire, 2m
		(AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator out diameter: ø1.25)			
Material		Case/Nut: Nickel plated Brass, Washer: Nickel plated Iron, Sensing surface: PBT, Standard cable(Black): Polyvinyl chloride(PVC), Oil resistant cable(Gray): Oil resistant Polyvinyl chloride(PVC)			
Weight※ <sup>2</sup>		Approx. 64g(approx. 52g)		Approx. 84g(approx. 72g)	

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※2: The weight with packaging and the weight in parentheses is only unit weight.



※Environment resistance is rated at no freezing or condensation.

# Electric Capacitive type



## ■ Dimensions

(unit: mm)

### ● CR18-8

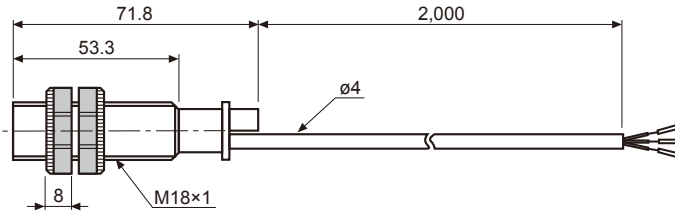



### ● CR30-15

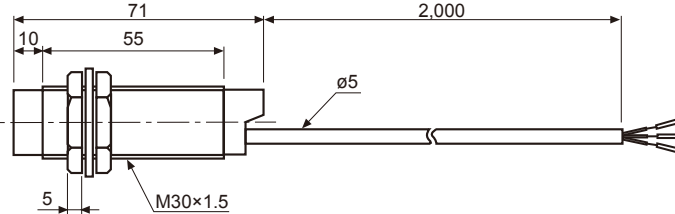


## ■ Control output diagram

### ◎ DC 3-wire type

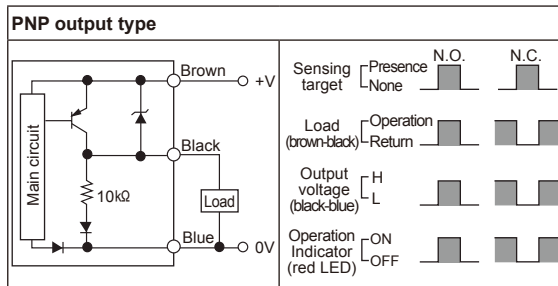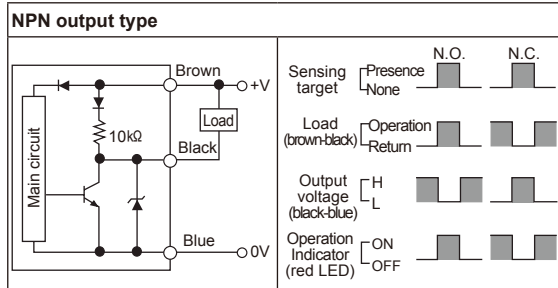


### ◎ AC 2-wire type

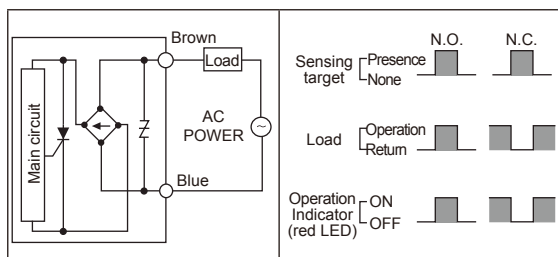


## ■ Connections

### ◎ DC 3-wire type

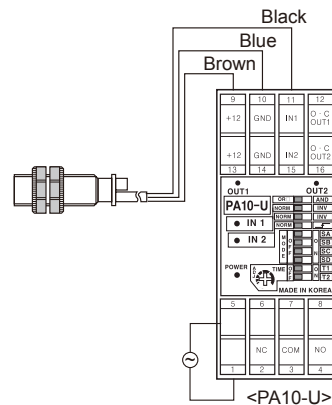

### ◎ AC 2-wire type

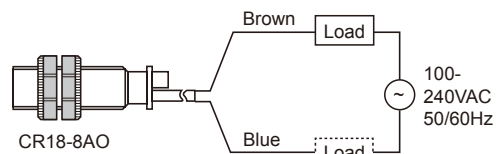

(A)	Photo electric sensor
(B)	Fiber optic sensor
(C)	Door/Area sensor
(D)	Proximity sensor
(E)	Pressure sensor
(F)	Rotary encoder
(G)	Connector/Socket
(H)	Temp. controller
(I)	SSR/Power controller
(J)	Counter
(K)	Timer
(L)	Panel meter
(M)	Tacho/ Speed/ Pulse meter
(N)	Display unit
(O)	Sensor controller
(P)	Switching mode power supply
(Q)	Stepper motor& Driver&Controller
(R)	Graphic/ Logic panel
(S)	Field network device
(T)	Software
(U)	Other



## ■ Sensitivity adjustment

Please turn potentention VR to set sensitivity as below procedure.

1. Without a sensing object, turn the potentention VR to the right and stop at the proximity sensor is ON(OFF).
2. Put the object in right sensing position, turn the potentention VR to the left and stop at the proximity sensor is OFF(ON).



3. If the difference of the number of potentention VR rotation between the ON(OFF) point and the OFF(ON) point is more than 1.5 turns, the sensing operation will be stable.
4. If it is set in sensitivity adjustment position of potentention VR at center between 1 and 2, sensitivity setting will be completed.



※When there is distance fluctuation between proximity sensor and the target, please adjust 2 at the farthest distance from this unit.

※Turning potentention VR toward clockwise, it will be max., or turning toward counter clockwise, it will be min. The number of adjustment should be 15±3 revolution and if it is turned to the right or left excessively, it will not stop, but it idles without breakdown.

※( ) is for Normally closed type.

## ■ Grounding




The sensing distance will be changed by grounding status of capacitive proximity sensor and the target[50×50×1mm(Iron)]. Please check the material when installing the sensor and selecting the target.

### ● CR18 type

Ground condition (Switch b)	ON	OFF
Operating distance (mm)	8	4


### ● CR30 type

Ground condition	Switch a	ON	OFF	ON	OFF
	Switch b	ON	ON	OFF	OFF
Operating distance(mm)		15	18	6	6




## ■ Mutual-interference & Influence by surrounding metals

When several proximity sensors are mounted closely, malfunction of sensor may be caused due to mutual interference. Therefore, be sure to keep a minimum distance between the two sensors as below charts.

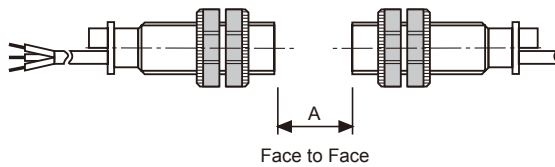


(unit: mm)

Item \ Model	CR18	CR30
A	48	90
B	54	90



When sensors are mounted on metallic panel, you must prevent the sensors from malfunction by any metallic object. Therefore, be sure to keep a minimum distance as below charts.

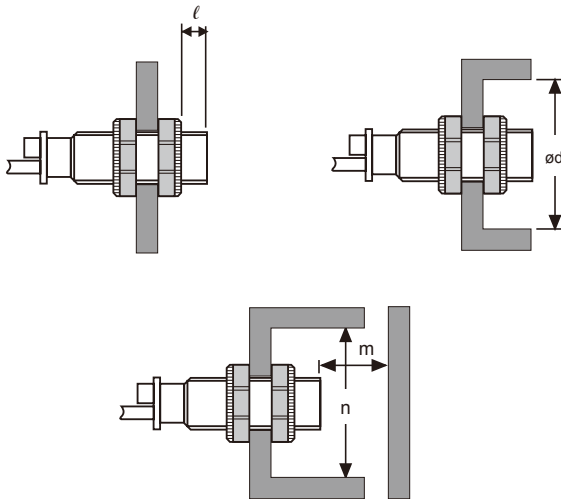

(unit: mm)

Item \ Model	CR18	CR30
$l$	20	10
$\phi d$	54	90
$m$	24	45
$n$	54	90

## ■ Materials

### ◎ Materials of sensing targets

Sensing distance may be different by electrical characteristic of sensing target (conductivity, non dielectric constant) and status of water absorption, size etc.

### ◎ Effect by high frequency electrical field

It may cause malfunction by machinery which generate high frequency of electrical field such as a washing machine etc.

### ◎ Surrounding environment

There is water or oil on surface of sensing part, it may cause malfunction.

If the bottle for sensing of level is coated by oil etc., it may cause malfunction.

Especially, 15mm type has high sensitivity for induced objects, please be careful of waterdrops.

### ◎ Organic solvents

Do not let the oil or oil liquid is flowed into the sensor because the case is made by plastic.

(A)  
Photo  
electric  
sensor

(B)  
Fiber  
optic  
sensor

(C)  
Door/Area  
sensor

(D)  
Proximity  
sensor

(E)  
Pressure  
sensor

(F)  
Rotary  
encoder

(G)  
Connector/  
Socket

(H)  
Temp.  
controller

(I)  
SSR/  
Power  
controller

(J)  
Counter

(K)  
Timer

(L)  
Panel  
meter

(M)  
Tacho/  
Speed/  
Pulse  
meter

(N)  
Display  
unit

(O)  
Sensor  
controller

(P)  
Switching  
mode power  
supply

(Q)  
Stepper  
motor &  
Driver & Controller

(R)  
Graphic/  
Logic  
panel

(S)  
Field  
network  
device

(T)  
Software

(U)  
Other